


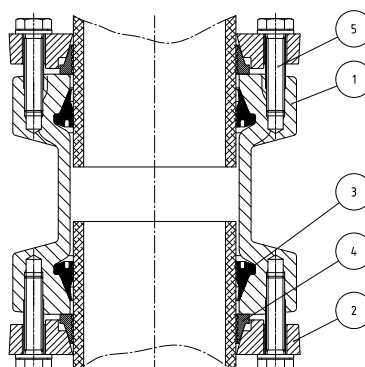

DESCRIPCIÓN COMPONENTES - COMPONENTS DESCRIPTION

Ítem	Descripción - Description	Material - Material
1	Cuerpo - Body	Fundición Nodular - Ductile Iron GGG 40 (EN-GJS-400-15)
2	Contrabrida - Flange	Fundición Nodular - Ductile Iron GGG 40 (EN-GJS-400-15)
3	Junta - Gasket	EPDM
4	Anilla - Ring	Latón - Brass
5	Tornillos - Bolts	Acero Inoxidable - Stainless Steel A2

CARACTERÍSTICAS BÁSICAS

- Presión de trabajo: PN 16.
- Temperatura máxima: 80 °C.
- Recubrimiento interior y exterior "EPOXY", 250 µm.
- Amarre independiente en ambos lados.

APLICACIONES GENERALES

- Para conectar tuberías de PE en instalaciones generales de agua, obra civil, hidráulica o riego.

Observaciones:

Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta.

La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

BASIC FEATURES

- Working pressure: PN 16.
- Maximum temperature: 80 °C.
- Inside and outside "EPOXY" powder coating, 250 µm.
- Independent lashing on both sides.


GENERAL APPLICATIONS

- To join PE pipes in civil, hydraulic or irrigation water systems.

Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application.

Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

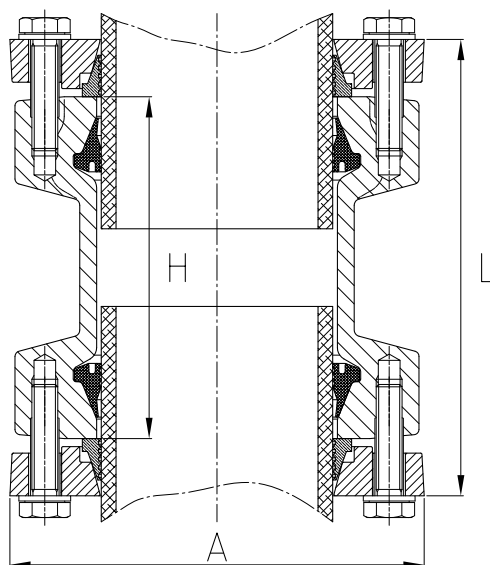
INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

Ø (mm)	COD.	DIMENSIONES - DIMENSIONS					Peso aprox. Weight aprox. (Kg)
		A (mm)	H (mm)	L (mm)	Tornillo/Bolt		
					Nº	Métrica	
63	VF730063	130	125	165	4	M10 x 35	3,0
75	VF730075	140	125	165	4	M10 x 35	3,7
90	VF730090	160	130	170	8	M10 x 35	5,2
110	VF730110	180	130	174	8	M10 x 35	5,8
125	VF730125	191	135	180	8	M10 x 35	6,4
140	VF730140	210	145	192	8	M10 x 35	8,3
160	VF730160	235	170	220	8	M12 x 40	10,9
200	VF730200	282	210	260	8	M12 x 45	14,8
250	VF730250	345	240	292	12	M12 x 45	22,7
315	VF730315	400	300	360	12	M12 x 50	33,0

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.

Note : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-02.20

2/2