
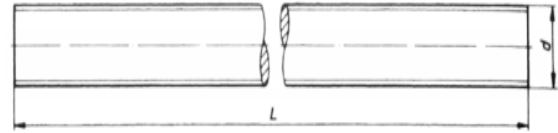


# VARILLA ROSCADA ACERO AL CARBONO DIN 975

## CARBON STEEL THREADED ROD DIN 975

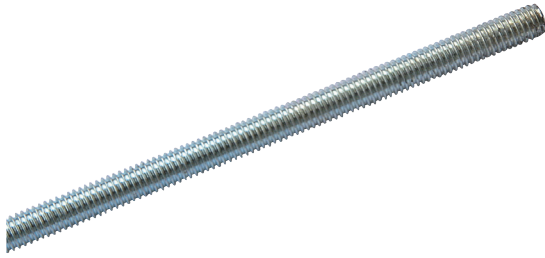

### INFORMACIÓN TÉCNICA - TECHNICAL INFORMATION

Designación - Designation		DIMENSIONES - DIMENSIONS		Peso aprox. 1000 unid. Weight aprox. 1000 units (kg)
COD.	Métrica - Metrics d	Paso de rosca - Thread pitch (mm)	L (mm)	
T9750004	M4	0,70	1000	78
T9750005	M5	0,80	1000	124
T9750006	M6	1,00	1000	177
T9750008	M8	1,25	1000	319
T9750010	M10	1,50	1000	500
T9750012	M12	1,75	1000	725
T9750014	M14	2,00	1000	970
T9750016	M16	2,00	1000	1330
T9750018	M18	2,50	1000	1650
T9750020	M20	2,50	1000	2080
T9750022	M22	2,50	1000	2540
T9750024	M24	3,00	1000	3000
T9750027	M27	3,00	1000	3850
T9750030	M30	3,50	1000	4750

### CARACTERÍSTICAS BÁSICAS

- Rosca métrica.
- Dimensiones conforme a la norma DIN 975.
- Material: Acero al carbono (4.8) zincado.

#### Observaciones:

Dada la complejidad, variedad y gran cantidad de especificaciones particulares de cada instalación, en conjunción con la existencia de diversos factores que pueden afectar a las condiciones de trabajo y naturaleza del producto, es responsabilidad del usuario final realizar los ensayos necesarios para garantizar el correcto funcionamiento del producto en cada aplicación concreta. La instalación del producto deberá realizarse y mantenerse siguiendo códigos de buena práctica y/o estándares existentes.

### BASIC FEATURES

- Metric thread.
- Dimensions according to DIN 975 standard.
- Material: Carbon steel (4.8) zinc coated.

#### Remarks:

Due to the complexity, variety and large number of particular specifications for each installation, along with the existence of diverse factors which can affect the working conditions and nature of the product, it is the responsibility of the end-user to carry out the necessary tests to ensure the proper functioning of the product in any specific application. Product installation must be carried out and maintained following the good practice codes and/or updated technical standards.

Nota : Debido al constante desarrollo de nuestros productos, los datos suministrados pueden ser alterados sin previo aviso.

Nota : Due to the continuous development of our products, specifications may be changed without notification at any time.

Rev.0-10.20



Polígono Industrial ATUSA - Agurain S/N - 01200 Salvatierra (Alava) España  
Tel.: (+34) 945 18 00 00 Fax : (+34) 945 30 01 53 e-mail: ventas@atusa.es  
[www.atusa.es](http://www.atusa.es)

